

**ZIMBABWE REVENUE AUTHORITY
COMMISSIONER GENERAL**



WRITE TO:
CGOffice@zimra.co.zw

or
**ZIMBABWE
REVENUE
AUTHORITY
PO BOX 4360
HARARE**

TELEPHONE

:
**+263-242-
775332
752 046
FAX:
+263-242-
774087**

CALL AT:

**RECEPTION
6th FLOOR, ZB CENTRE
59 KWAME NKRUMAH
AVE
HARARE**

QUOTE:

REF: NCB01/2022

10 February, 2022

Attention: All Bidders

**ADDENDUM NO.1 TO NCB01/2022 FOR THE SUPPLY, DELIVERY,
INSTALLATION AND COMMISSIONING OF AIR CONDITIONERS FOR 16
EXECUTIVE OFFICES AT ZIMRA ZB CENTRE.**


Following the site meeting held on the 7th of February, 2022 at ZIMRA ZB Centre, you are all advised to take note of the additional information as per annexure 'A' attached below,


All other requirements including the closing date and time will remain unchanged as per Bidding Document.

Yours Sincerely,

T. SHONHIWA

DIRECTOR PROCUREMENT MANAGEMENT UNIT

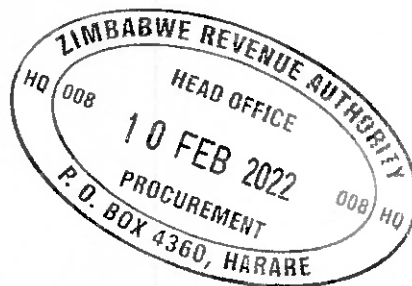


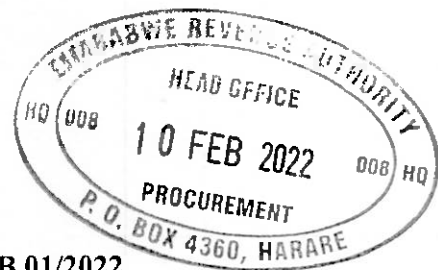


ANNEXURE 'A' TO NCB 01/2022

TECHNICAL SPECIFICATIONS FOR AIR CONDITIONER INSTALLATIONS FOR EXECUTIVE OFFICES

OFFICE	FLOOR	ADDITIONAL MATERIALS	ELECTRICALS
Acting Commissioner General	1st	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	
Loss Control Director	3 rd	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	
Board Secretary	5 th	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	
Corporate Affairs Executive	5 th	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	
Director ICT	6 TH	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	1) 80AMP ISOLATOR X 01 2) 60AMP BREAKER X 01 3) 4 CORE 16MM ARMOURED CABLE X 30M
Director Internal Audit	6 th	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	4) WEATHER PROOF

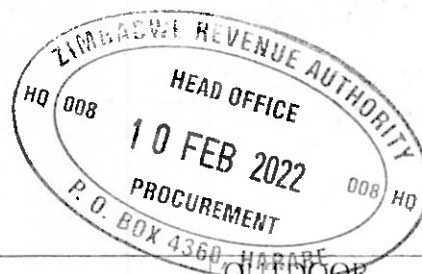

			OUTDOOR ELECTRICAL BOX 10WAY X 01
Commissioner Domestic Taxes	6 th	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 01	5) WEATHER PROOF OUTDOOR ELECTRICAL BOX 2 WAY X 04 ALL REQUIREMENTS FOR 6 th FLOOR
Commissioner Customs	6 th	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	
Director Human Capital	7 th	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	1) 80AMP ISOLATOR X 01 2) 60AMP BREAKER X 01 3) 4 CORE 16MM ARMOURED CABLE X 30M
Executive Assistant	7 th	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 01	4) WEATHER PROOF OUTDOOR ELECTRICAL BOX 10WAY X 01
Director Finance and Admin	7 th	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	5) WEATHER PROOF OUTDOOR ELECTRICAL BOX 2 WAY X 05
Director Legal services	7 th	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	
Director Infrastructure	7 th	2.5MM FLEX CABLE 20M 20AMP SP BREAKER X 01	ALL REQUIREMENTS FOR 7 TH FLOOR
Director Strategy Research & Modernisation	9 th	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	

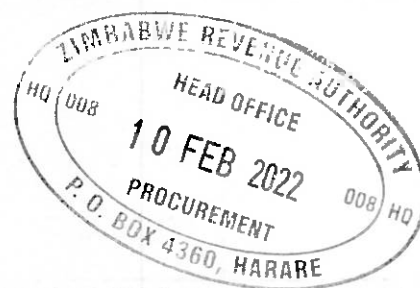

Director Procurement	10 th	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	
Acting Commissioner Revenue Assurance	1 st	2.5MM FLEX CABLE 30M 20AMP SP BREAKER X 02 WEATHER PROOF OUTDOOR ELCTRICAL BOX 2 WAY X 01	

MEASUREMENTS

Gap measurements between the floor ceiling deck and ceiling in different floors is 700 mm.

NOTE:

All Pipes to be insulates with amourflex.

All units to have remote control and user manual for use.

All out door units to be secured on the balcony by rawl bolts.

All units to use R410a